




C000001089

UV FLEXO GLOSS BVG 80 PLUS GHS

SERIES

UV FLEXO GLOSS BVG 80 PLUS GHS.
UV curing varnish for printing on UV
Flexo coaters, offering a gloss finish and
excellent aesthetic quality, designed for
applications on paper, cardboard and
various synthetic substrates.

Product features

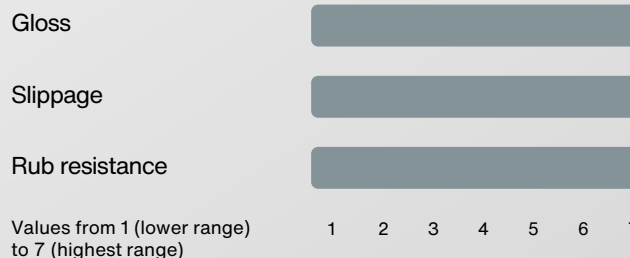

Printing behaviour

- High rub resistance
- Viscosity 40-50s
- This varnish is not suitable for food applications unless an appropriate risk analysis demonstrates that it is safe for its use.
- Non-stampable
- All types of paper and cardboard.
- Certain corona treated PE films. Minimum surface tension 38 dynes/cm
- Other substrates: to be tested

Martínez Ayala S.A.
Polígono Industrial El Saladar
C/ La Higuera, 28
(30.850) Totana, Murcia - España
Tel: +34 968 41 80 30

info@ma-inks.com
www.ma-inks.com





Recommendations

- Pre-testing is always recommended.
- UV coatings should be kept in stock at temperatures between 15 - 25°C and should not be exposed to direct sunlight. If possible, store the varnish in a dark room.
- **Shelf life:** 12 months after the date of manufacture.

The aim of our technical documents is to inform and advise our customers. The information provided herein is correct to the best of Martínez Ayala's knowledge and belief. No liability for any errors, facts or opinions will be accepted. Customers must verify and test by themselves the suitability of this product for their application. No liability for any loss as a result of any person placing reliance on any material contained herein will be accepted.

Martínez Ayala S.A.
Polígono Industrial El Saladar
C/ La Higuera, 28
(30.850) Totana, Murcia - España
Tel: +34 968 41 80 30

info@ma-inks.com
www.ma-inks.com

