



C000000980


UV FLEXO LED GLOSS VARNISH

SERIES

UV FLEXO LED GLOSS VARNISH.

Radically curing UV varnish suitable for all coating machines and flexo units, specially developed for LED-UV curing unit. Designed for printing on paper, cardboard and some PE substrates with corona treatment.

Product features

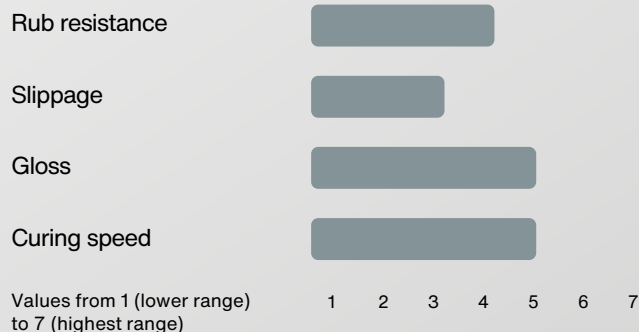

Printing behaviour

- Suitable for paper, cardboard and certain PE substrates with corona treatment.
- Application: wet over dry on conventional inks and wet on wet or wet over dry on UV inks.
- Glueable.
- Low odour both wet and after curing.
- Formulated with low toxicity ingredients.
- Not suitable for food packaging printing.

Martínez Ayala S.A.
Polígono Industrial El Saladar
C/ La Higuera, 28
(30.850) Totana, Murcia - España
Tel: +34 968 41 80 30

info@ma-inks.com
www.ma-inks.com





Recommendations

- Pre-testing is always recommended.
- Shake well before use.
- **Storage:** Store at a temperature between 15 – 20°C and avoid direct exposure to light and heat. A conditioned and clean working environment facilitates the good performance of all components during printing. **UV FLEXO LED GLOSS VARNISH** has a shelf life of 12 months after date of manufacture.

The aim of our technical documents is to inform and advise our customers. The information provided herein is correct to the best of Martínez Ayala's knowledge and belief. No liability for any errors, facts or opinions will be accepted. Customers must verify and test by themselves the suitability of this product for their application. No liability for any loss as a result of any person placing reliance on any material contained herein will be accepted.

Martínez Ayala S.A.
Polígono Industrial El Saladar
C/ La Higuera, 28
(30.850) Totana, Murcia - España
Tel: +34 968 41 80 30

info@ma-inks.com
www.ma-inks.com

